

Sensis® Indigo CSD-H Series Cabinet Smoke Detector

[EN] 4010-100 – Indigo CSD-H10
[EN] 4011-100 – Indigo CSD-H11
(with CO Sensor)

The Sensis Indigo CSD-H is an advanced early warning aspirating smoke detector designed specifically for small rooms below 100m² and cabinet fire detection. With its compact design, Indigo CSD can be installed inside individual cabinets to perform precise air sampling smoke detection. Its high sensitivity – reaching Fire 1 levels at 0.8% obscuration per meter – enables extremely early warning of smoke presence and helps accurately identify which cabinet is affected. Indigo CSD offers a reliable and efficient solution for cabinet fire detection.

The Sensis Indigo CSD-H features a single 8 mm sampling inlet, which can also be easily connected to standard 25 mm aspirating pipe using compatible fittings for flexible installation, a single aspirator with flow sensor and a high-sensitive smoke detector. The sensitivity level can be selected from pre-set configuration, up to 0.8% obs/m. The Sensis Indigo CSD-H also comes equipped with a mini 3-in-1 numerical display that provides real-time smoke and air flow values. The display also allows users to perform additional input functions such as reset, isolate, silence and test.



FEATURES

Very early warning smoke detection – Alarm sensitive range of 0.02-25% obs/m, covering a maximum area of up to 100m²

Mini 3-in-1 display – Mini 3-in-1 display provides real-time smoke level and air flow values with additional input functions (Reset, Isolate, Silence and Test)

Built-in temperature and humidity sensors – Provides additional environmental monitoring and enhanced detection accuracy in cabinets and small spaces

Four alarm levels – Alert, Action, Fire 1, Fire 2

Remote Display Unit – The Indigo CSD-H can be connected to a Remote Display Unit (RDU), ideal for challenging environments where the CSD-H units are not easily accessible

Smart Smoke Level (SSL) – Operates 24/7 to continuously monitor the background environmental value and establish a reference point for smoke concentration and alarm threshold to improve reliability and reduce false alarms

Supports Modbus RTU open protocol – connect up to 250 devices on a network

Additional features – 8 x preset Fire 1 levels, 2 x event thresholds for temperature, humidity and CO (CSD-H11 only), 2 x relay outputs, and RS485 connectivity

APPLICATIONS

Data centres

Electrical cabinets

High-risk equipment

Industrial control panels

Small rooms below 100m²

APPROVALS

EN 54-20 approved.

SCAN THE QR CODE
TO EXPLORE THE SENSIS
PRODUCT RANGE



Sensis®

Indigo CSD-H Series

Cabinet Smoke Detector

Datasheet


PERFORMANCE	
Smoke detection principle	Light scattering mass detection
Smoke detection range	0.02-25%/m
CO detection range	0-1,000 ppm (H11 model only)
Temp. detection range	0-100°C
Humidity detection range	0-100% RH
Area coverage	100m ²
Pipe/tube length	30 m
Sampling holes	Class A = 2 holes
	Class B = 4 holes
	Class C = 4 holes
Alarm levels and time delay	
Alert	(0-60 seconds)
Action	(0-60 seconds)
Fire-1	(0-60 seconds)
Fire-2	(0-60 seconds)
Environment smoke learning	• 5 background average mode • 24 hours, 365 days non-stop smoke background level learning
Flow monitoring	• Pipe flow normalize to 100% • Flow high and flow low fault
Aspirator speed	10 speed adjustable

ELECTRICAL SPECIFICATION	
Relay output	2 relays (configurable)
Rating	2 A @ 30 Vdc
General purpose inputs	1 x GPIs (configurable)
Power	10-28 Vdc 170 mA

OPERATING CONDITIONS	
Device operating temp.	0° to 40°C (32° to 104°F)
Sampling air temp.	-20° to 60°C (-4° to 140°F)
Humidity	10-95% RH non-condensing

MECHANICAL SPECIFICATION	
Dimensions	100(h) x 227.4(w) x 47.8(d) mm 4"(h) x 9"(w) x 1¾"(d)
IP rating	IP41
Weight	0.725 kg (1½ lb)

DIMENSIONS & MOUNTING

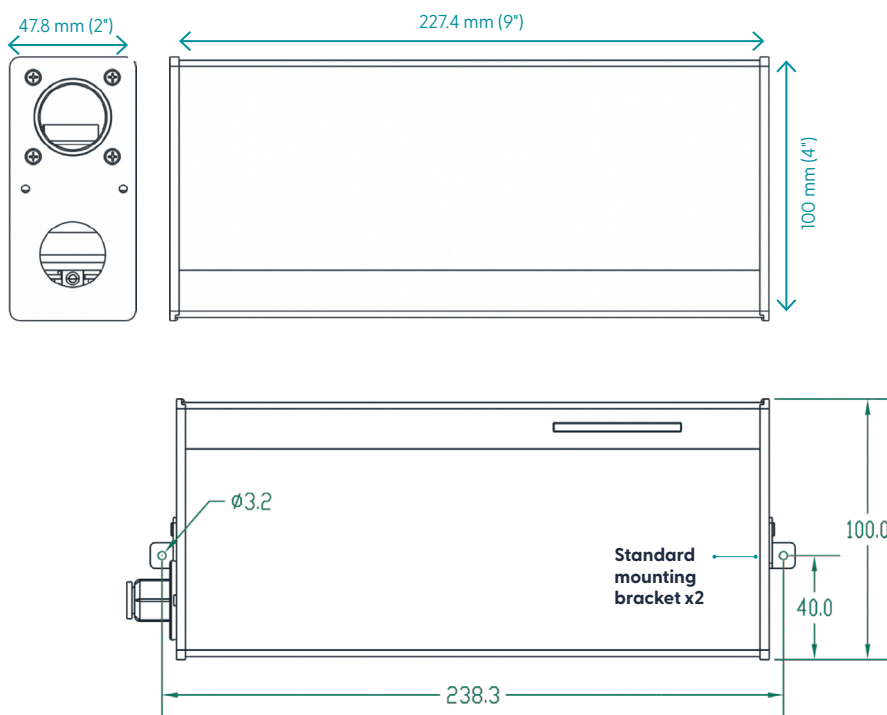

FFE Limited, 9 Hunting Gate, Hitchin, Hertfordshire SG4 0TJ, UK
 t: +44 (0) 1462 444 740 e: sales@ffeuk.com w: ffeuk.com
FFE Limited, 1455 Jamike Ave Ste 200, Erlanger, KY 41018-3147, USA
 t: +1 859 957 1570 e: america@ffeus.com w: ffeus.com

Specifications and wiring information are provided for information only and are believed to be accurate. FFE Ltd assumes no responsibility for their use. Data and design are subject to change without notice. Installation and wiring instructions are shipped with the products and should always be used for actual installation. For more information, contact your Sales Representative.
 Document Part No: 24-0438-01